


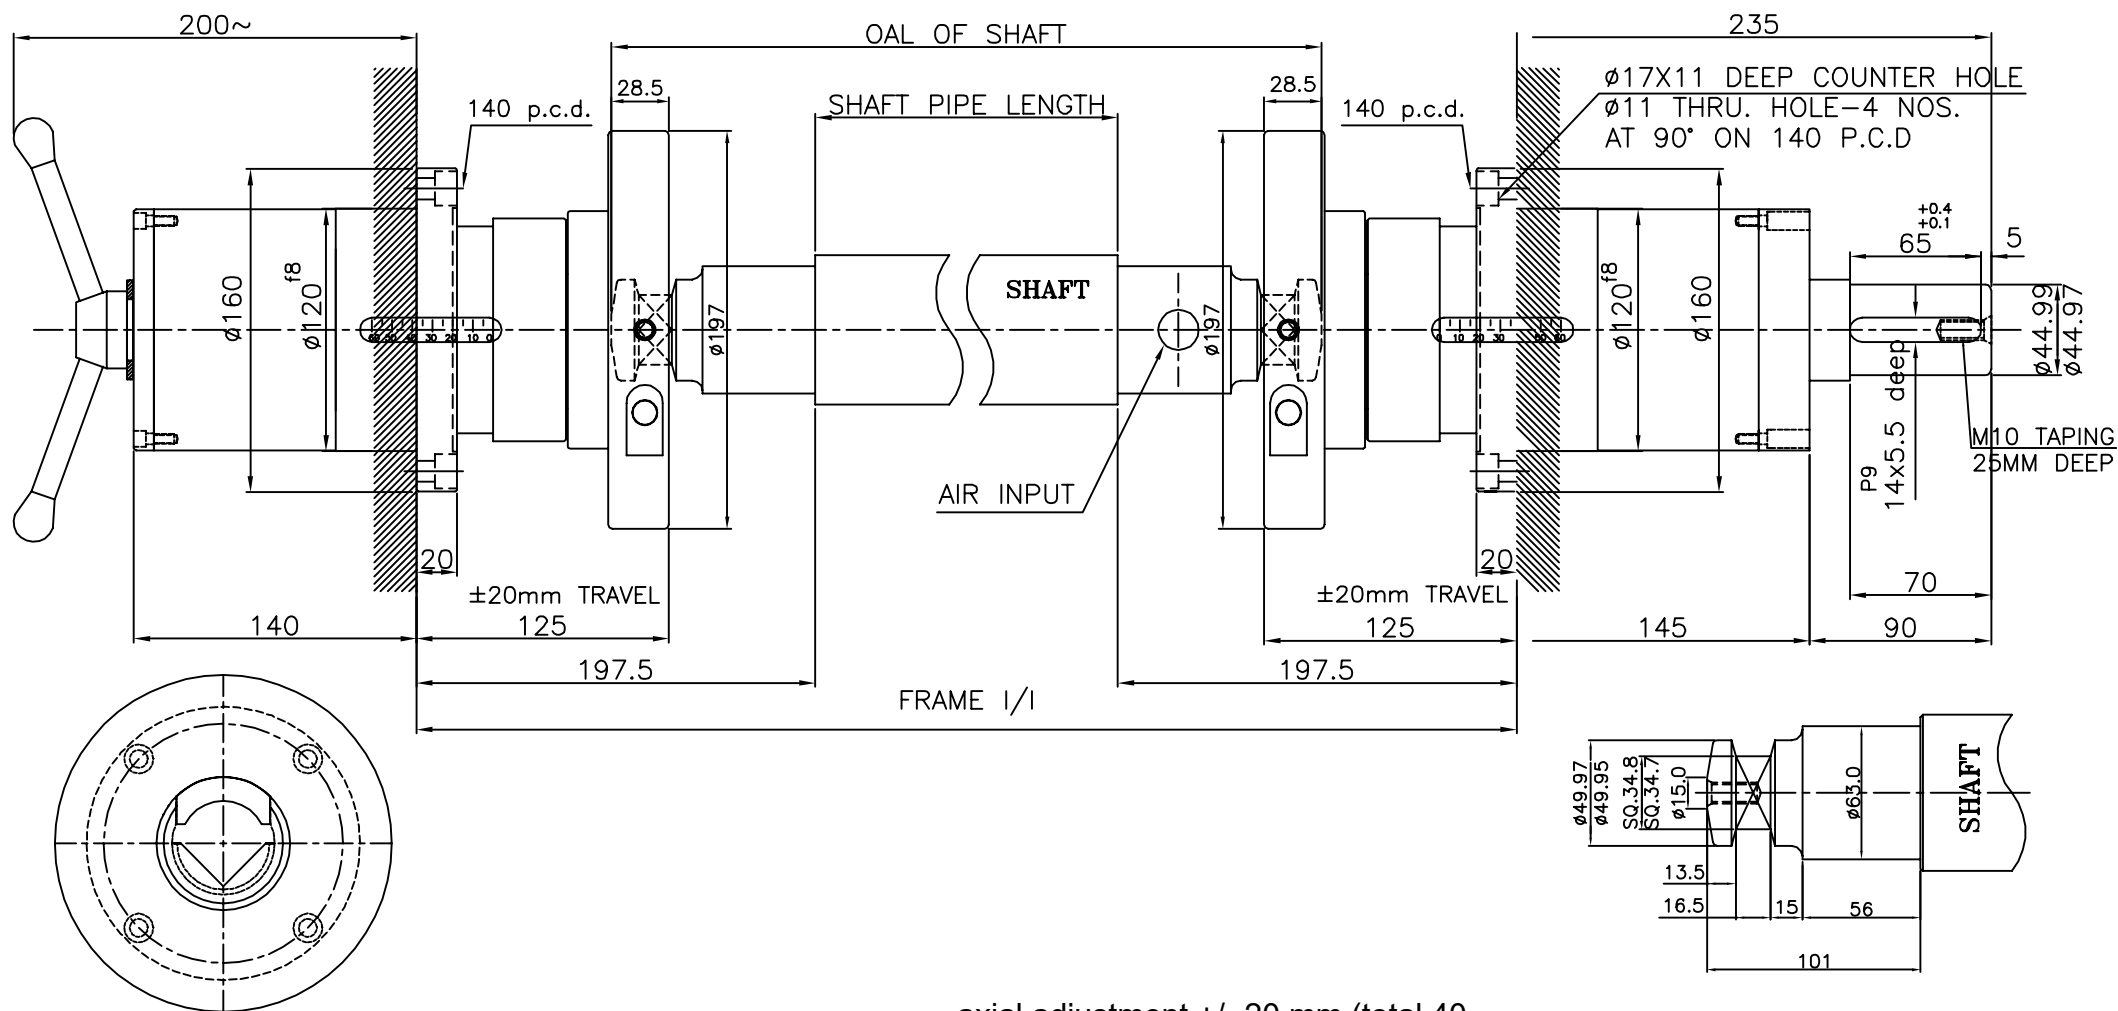

axial adjustment +/- 20 mm (total 40)

Max. weight (per pair)	Max. torque	Max. speed	Dimensions of inserts	Drive shaft diameter
1200 kg	-	200 m / min	⌀ 35 mm	Ø max. 45 mm

On request: